



## Haitzled BirdCare Poultry Lighting

### BirdCare -TUBE- Technical features



A unique flicker-free and dimmable lighting solution that helps in improving well-being and promoting the production of your poultry.







Tel: 088 291 22 99 \* Web: [www.haitzled.com](http://www.haitzled.com) \* Mail: [info@haitzled.com](mailto:info@haitzled.com)


## Features

- \* Unique design, optimal uniform lighting distribution which avoid clustering
- \* Super high efficiency - high energy saving
- \* Available in 2 channels with UV-A
- \* 0-100% smooth dimming (Triac 0-10V) function flicker free;
- \* IP67 rating, withstand high pressure washdown
- \* PMMA cover, ammonia resistant
- \* Aluminum base heat dissipation
- \* Available in DC 48V or AC 110/230V
- \* Easy cleaning, easy installation
- \* 5 years warranty, >80.000 hours lifespan

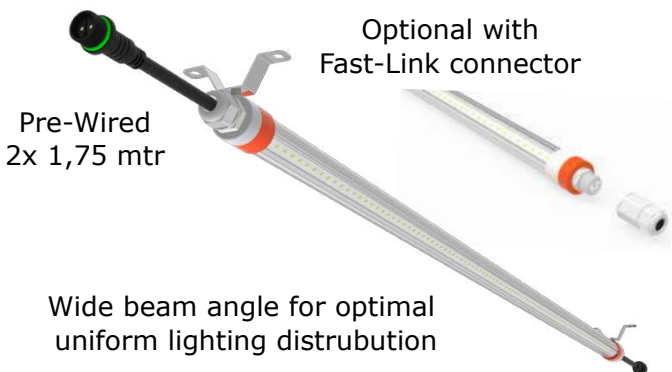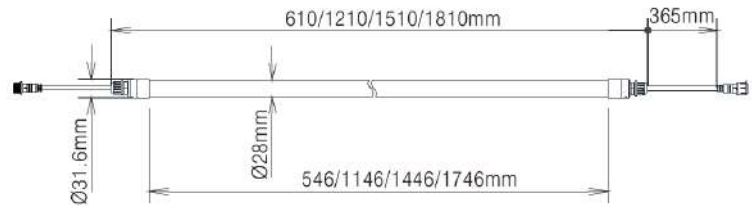

Wide beam angle for optimal uniform lighting distribution

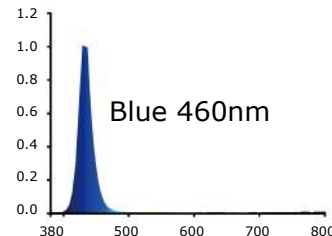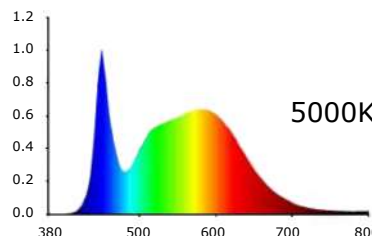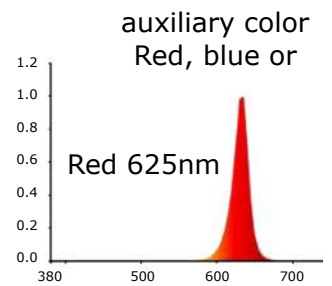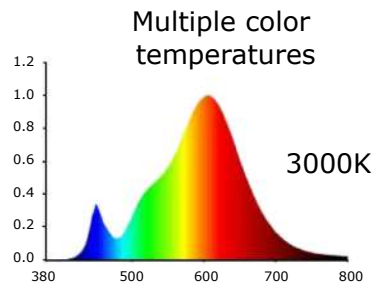

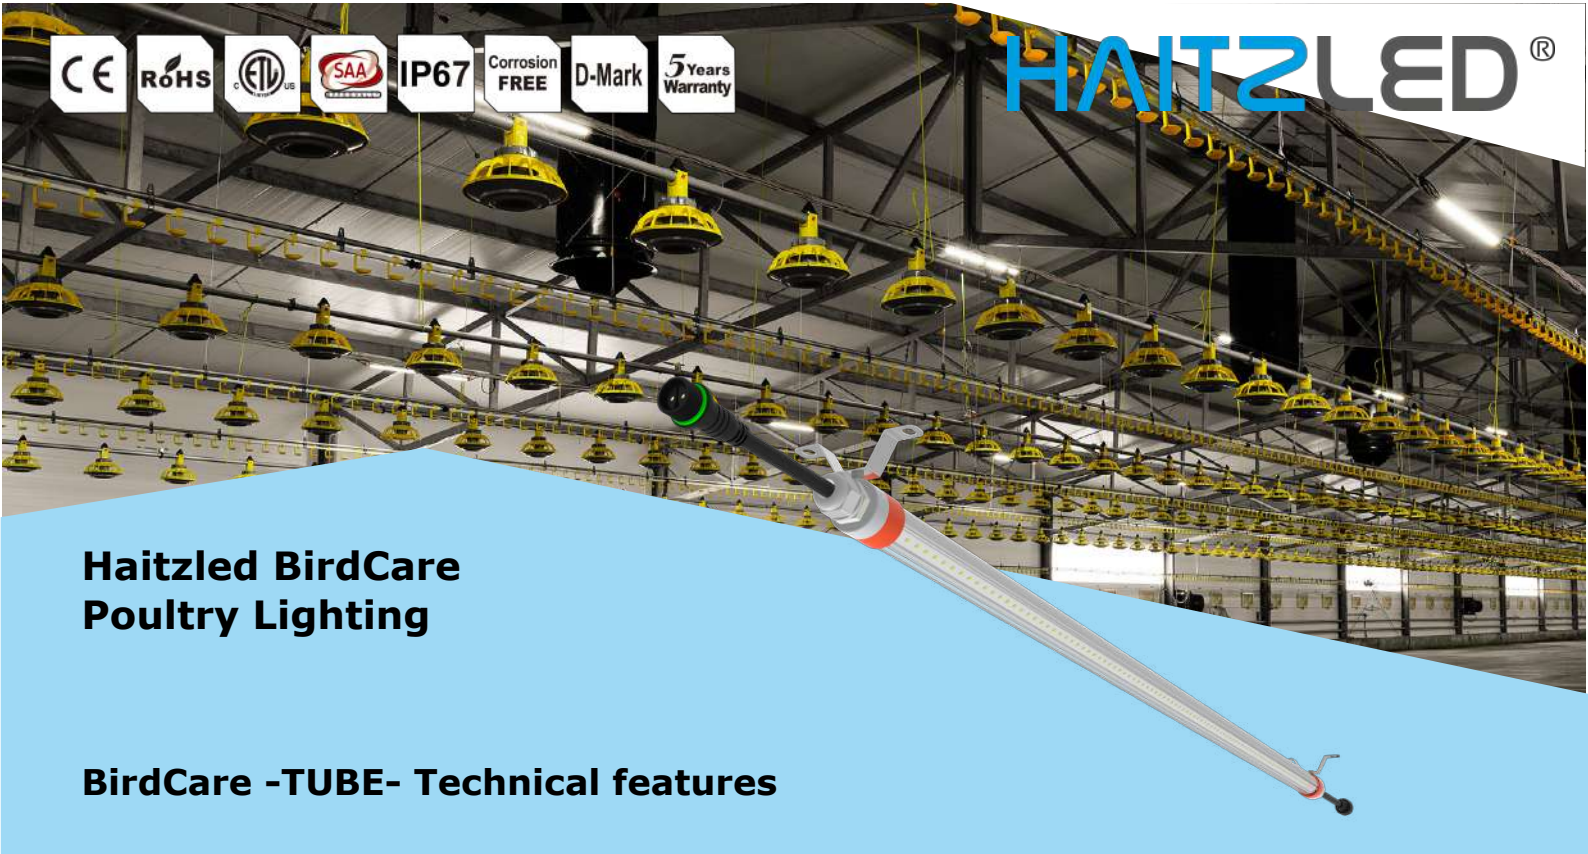

# Haitzled BirdCare Poultry Lighting

## BirdCare -TUBE- Technical features

### HAITZLED BirdCare TUBE

#### Model number

#### Features

BirdCare	Bulb or Tube	Length * 100mm	P in Watt +8 for 2CH	Intern or Extern driver	Color temperatures	V-shape, WR=white rec WB= white blue	With or without UV	Luminous efficiency lm	Luminous efficiency lm	CRI	Beam angle	Input voltage
BC	T	06	- 09	INT	2700K-6500K	- WB/WR	UV	120 lm/W	1620	>80	120°	230 VAC
BC	T	12	- 20	INT	2700K-6500K	- WB/WR	UV	120 lm/W	3600	>80	120°	230 VAC
BC	T	15	- 24	INT	2700K-6500K	- WB/WR	UV	120 lm/W	5040	>80	120°	230 VAC
BC	T	18	- 28	INT	2700K-6500K	- WB/WR	UV	120 lm/W	5400	>80	145°	230 VAC
BC	T	06	- 09	EXT	2700K-6500K	- WB/WR	UV	120 lm/W	1620	>80	120°	48 VDC
BC	T	12	- 20	EXT	2700K-6500K	- WB/WR	UV	120 lm/W	3600	>80	120°	48 VDC
BC	T	15	- 24	EXT	2700K-6500K	- WB/WR	UV	120 lm/W	5040	>80	120°	48 VDC
BC	T	18	- 28	EXT	2700K-6500K	- WB/WR	UV	120 lm/W	5400	>80	145°	48 VDC

